



90° Angle Surface Probes



- Standard Frequency Range is **50-500 kHz**.
- For Frequency Range of **200 kHz–2 MHz** add a **/H** at the end of the part number
- Standard Probe Length is 6.0". Other lengths Available by Request
- Standard Probe Drop is 1/2". Other Drop Lengths Available by Request
- Select either Microdot or Fischer Triaxial connector
- Probes with Fischer Triaxial Connectors have Integral Reference Coils




Microdot



Fischer Triax

Part Number Example

VM2502AF-1/2 x 6

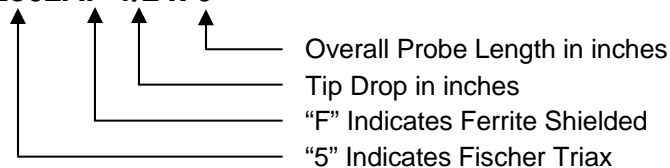

| Part # | CONNECTOR TYPE | | | | FREQUENCY |
|------------|---------------------|---------------------------|------------------|------------------------|-------------------|
| | Unshielded Microdot | Ferrite Shielded Microdot | Unshielded Triax | Ferrite Shielded Triax | 50 kHz to 500 kHz |
| VM202A-6 | ✓ | | | | ✓ |
| VM202AF-6 | | ✓ | | | ✓ |
| VM2502A-6 | | | ✓ | | ✓ |
| VM2502AF-6 | | | | ✓ | ✓ |

