


EVi display adapter to external monitor P/N 79519

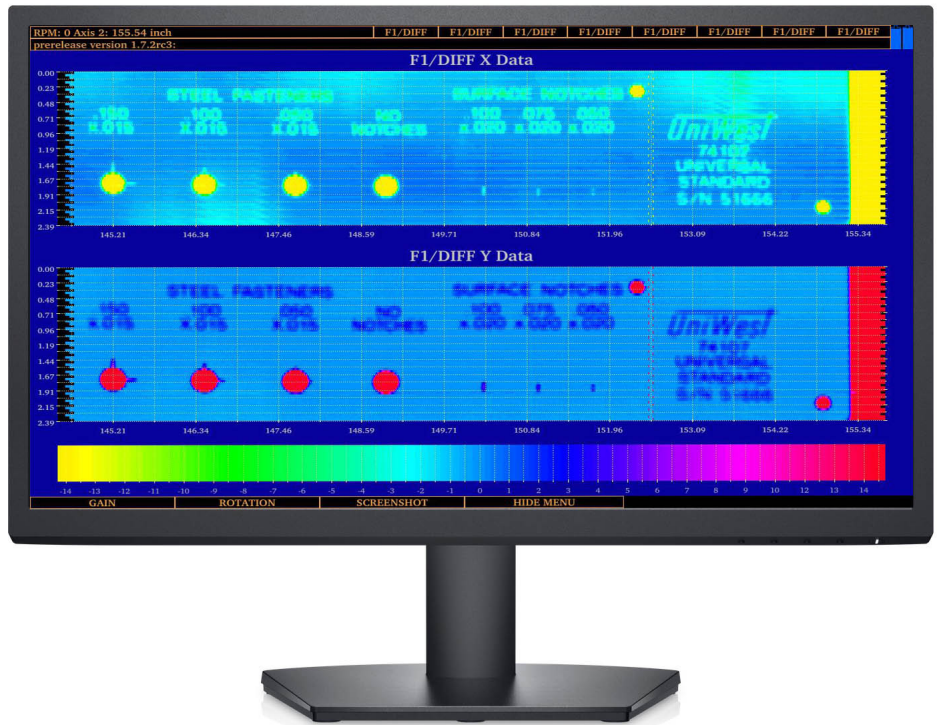

- Video out from the EVi is achieved via the instrument's USB-A connector (USB 1 or USB2) and a UniWest approved video adapter (Plugable USB 2.0 HDMI/DVI/VGA adapter, UniWest P/N 79519).
- The external monitor must be able to support a screen width of 1280.
- Connection sequence: first connect the video cable between the adapter and monitor, then connect the adapter to the USB port on the EVi.